
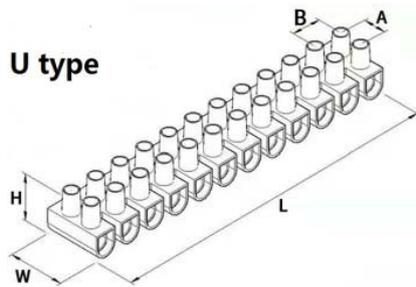



Product Technical Data Sheet - Polyethylene Terminal Blocks

High quality durable terminal blocks.
Made from impact resisting Polyethylene.
Available in both black and natural.

Supplied as a twelve pole strip which can easily be cut to size.

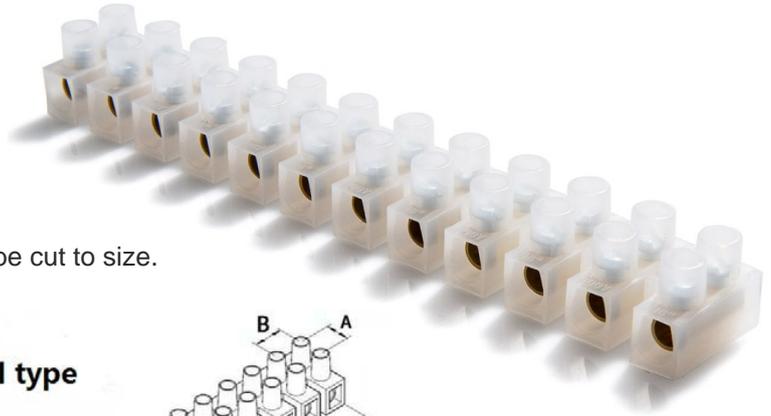

U type

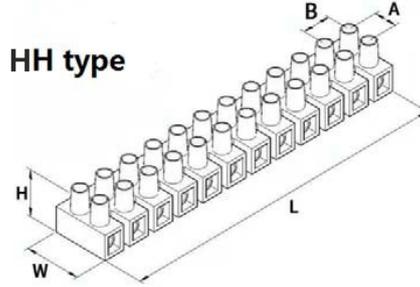

HH type

U TYPE - STANDARD

| Code | Current | Shape | L | W | H | A | B | Weight(g) |
|-------|---------|-------|-------|------|------|-----|------|-----------|
| TBP3 | 3AMP | U | 89.7 | 15.0 | 11.6 | 5.0 | 7.5 | 12.9 |
| TBP5 | 5AMP | U | 102.6 | 16.0 | 12.0 | 5.2 | 8.8 | 13.2 |
| TBP15 | 15AMP | U | 121.5 | 18.8 | 14.7 | 6.6 | 9.9 | 26.2 |
| TBP30 | 30AMP | U | 163.0 | 23.4 | 18.0 | 9.4 | 14.0 | 49.8 |
| TBP60 | 60AMP | U | 183.0 | 25.0 | 22.1 | 8.5 | 15.6 | 75.2 |

HH TYPE - HEAVIER DUTY INSERTS - HIGH QUALITY

| Code | Current | Shape | L | W | H | A | B | Weight(g) |
|----------|---------|-------|-------|------|------|------|------|-----------|
| TBP3 HH | 3AMP | H | 92.0 | 15.7 | 12.2 | 5.6 | 7.6 | 16.4 |
| TBP5 HH | 5AMP | H | 107 | 17.5 | 12.9 | 5.7 | 8.8 | 22.7 |
| TBP15 HH | 15AMP | H | 139.0 | 21.2 | 17.4 | 9.8 | 12.0 | 51.4 |
| TBP30 HH | 30AMP | H | 162.0 | 24.2 | 19.7 | 11.1 | 13.5 | 66.2 |
| TBP60 HH | 60AMP | H | 181.0 | 27.7 | 23.5 | 12.0 | 15.2 | 98.0 |

Specification.

Block: Polyethylene (PE)
 Inserts: Brass
 Screws: Galvanised Steel
 Maximum Temperature: 85°C
 Maximum Voltage: 400V

Meets the requirements of:
(Low Voltage Directive 2014/35/EU)
BS EN 60998-2-1
CE Marked.



Partex Marking Systems (UK) LTD

61-64 Station Road, Coleshill, Birmingham B46 1JT

Tel: 01675 463670 Fax: 01675 463520 Email: sales@partex.co.uk



Issue 4
September 2023

www.partex.co.uk

